



SPECIAL FEATURES

- AUTOMATIC HEIGHT RETURN
- HYDRAULIC FOLDING 10 FT. EXTENSION
- HEAVY DUTY SHOCK ASBORBER ON SLED
- BOX BEAM FRAME SUPPORT BEHIND AXLES
- #80 PITCH HEAVY DUTY CHAIN TO DRIVE SLED
- 6 HYDRAULIC OUTRIGGERS FOR FRAME SUPPORT & TILTING
- LUBRICATION STATION FOR BOOM & LIFT CYLINDER PIVOT POINTS
- KICKER OUTBOARD OF TROUGH PIVOT POINT FOR MORE BALANCED PIPE REMOVAL
 - 30 FT. PLUS HIEGHT CAPABILITY
 - 4,000 LB LIFTING CAPACITY
 - 35 SECOND COMPLETE CYCLE TIME AT 30 FT
 - 30 GALLON HYDRAULIC AND DIESEL RESERVOIRS
 - KUBOTA 48 HP DIESEL ENGINE WITH ENCLOSURE
 - REMOTE CONTROL UP TO 1,000 FT DISTANCE
 - PRESSURE COMPENSATED LOAD SENSE PUMP
 - PROPORTIONAL VALVE FOR FINE HYDRAULIC CONTROL
 - 6 HYDRAULIC CONTROLLED STABILIZERS
 - 6 HYDRAULIC CONTROLLED KICKERS
 - 6 HYDRAULIC CONTROLLED INDEXERS
 - GOOSENECK TRAILER PLATFORM
 - 19,360 LB GROSS WEIGHT (GVWR)
 - 15,680 LB REAR AXLE WEIGHT (GAWR)
 - 3,680 LB TONGUE WEIGHT

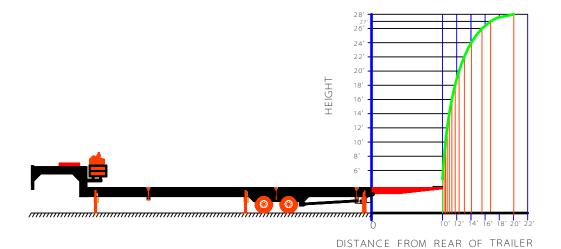

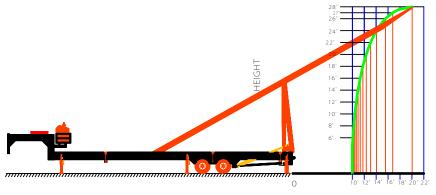

DISTANCE FROM REAR OF TRAILER